


TUFOOD FAT DROP HOSE

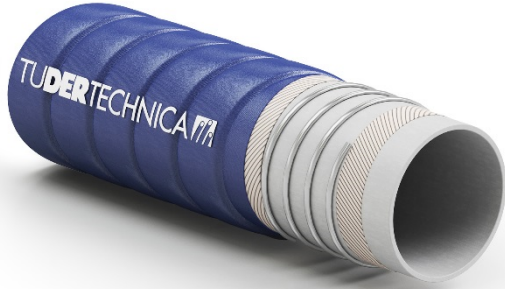

TECHNICAL CHARACTERISTICS

Temperature range: -25°C / +80°C (-13°F / +176°F)

Norms : ISO 1307 for dimensional tolerances



Extra flexible, light weight tank truck delivery drop hose suitable for a wide range of products. Recommended for fatty and non-fatty product.

DESCRIPTION

Tube

NBR, white, phthalates free, tested in compliance with 1907/2006/CE (REACH). Meets FDA 21 CFR 177.2600, BFR RECOMMENDATION XXI CAT 2, DM 21.03.73 E SEGUENTI, EUROPEAN REGLEMENT 1935/2004/CE, JAPAN-MINISTRY OF HEALTH AND WELFARE NOTICE NO.370,1959 AND NO.201,2006, 3A Sanitary Standard Class II

Reinforcement

synthetic plies, galvanized wire helices

Cover

wide corrugated, blue, abrasion, ageing and ozone resistant, cloth finish

Sterilization

refer to guidelines for cleaning and sanitizing on Tudertechnica website

Marking

TUDERTECHNICA TUFOOD® FAT

Inside diameter		Outside diameter		Vacuum		Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[mm]	[in]	[bar]	[psi]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
25	1,00	-	-	0,5	7,25	10	150	30	450	0,70	0,47	25	1,00
32	1,25	-	-	0,5	7,25	10	150	30	450	0,87	0,58	32	1,25
38	1,50	-	-	0,5	7,25	10	150	30	450	0,99	0,66	38	1,50
50	1,97	-	-	0,5	7,25	10	150	30	450	1,48	0,99	50	1,97
63,5	2,50	-	-	0,5	7,25	10	150	30	450	1,89	1,27	63,5	2,50
75	2,95	-	-	0,5	7,25	10	150	30	450	2,47	1,65	75	2,95
100	3,94	-	-	0,5	7,25	9	135	27	405	3,25	2,18	100	3,94

Other diameters, cover colours and pressure only on specific request.
Data refer to ambient temperature (20°C).